


RoHS2.0 compliant

REV	DATE	MODIFY

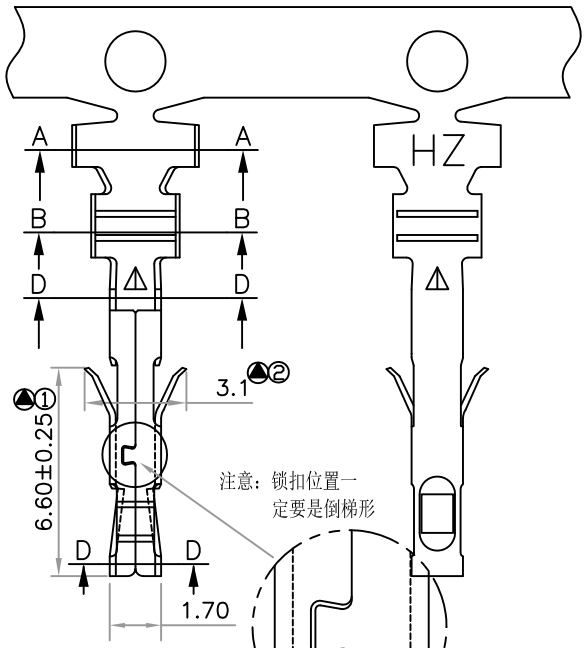


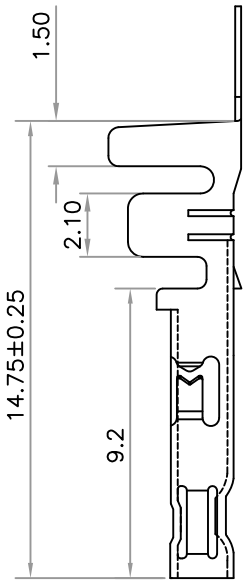

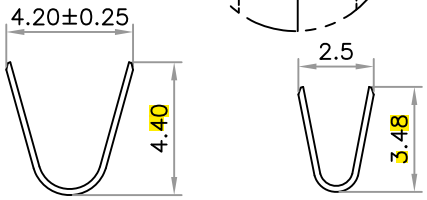


A–A

B–B



C–C



D–D

Features:

* Used in ZH-5700-H crimp housing
* Accepts AWG #18+18~18 Wire Range
* Insulation O.D.=1.3~3.1mm
* Material : High conductivity copper
* Finished: Tin-Plated
* Qty/Reel: 5000 PCS
* Thickness: 0.20mm

Ordering information:

ZH-5700-T X X R L T-3 Z
1 2 3 4 5 6 7

1 T=Terminal
2 Plated:
T=Tin G=Gold
3 Plated Method:
A: Plated before stamping
B: Stamping before plated
4 Material:
R: High conductivity copper
5 L: High Heel
6 T-3: New Tyep Termiral 3
7 Z: LOGO"ZH"

标示“▲”的尺寸需重点管控

TOLERANCE	
X.	--
X.X	±0.25
X.XX	±0.15
X.XXX	±0.05
ANGULAR	--
APPROVALS	
DRAWN	14 FEB 2022
CHECKED	
APPROVED	

Zen HighPrecision Industrial Ltd

TITLE: 4.20mm (.165") Pitch High Current Terminal

VIEW	SCALE	PART NO.	REV.
	1:1	ZH-5700-TXXRLT-3Z	A0
UNIT	SIZE	DWG NO.	SHEET
MM	A4	TB1-220203	1 OF 1

Zen High Precision Industrial Ltd PDF ISSUED D,C