

RoHS2.0 compliant

| REV | DATE | MODIFY |
|---|---|---|
| | | |

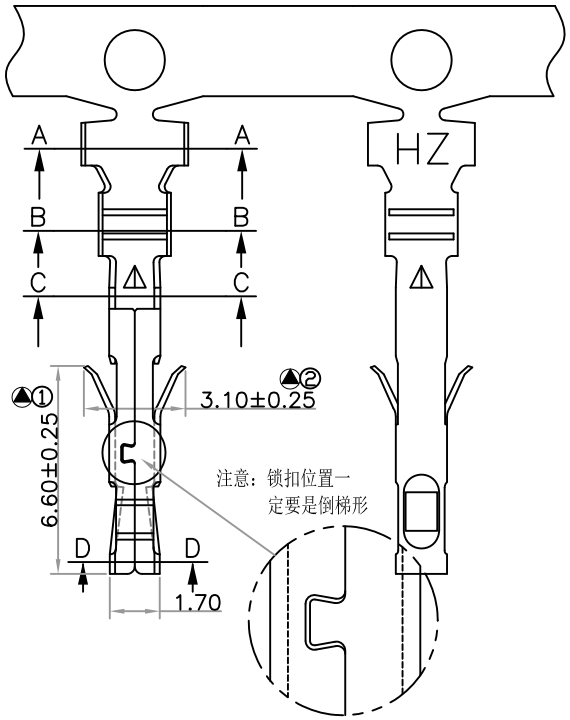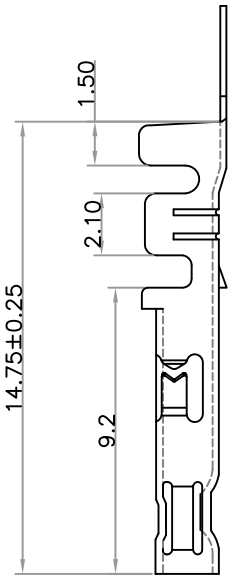



## *Features:*


* Used in ZH-5700-H crimp housing
* Accepts AWG #18~24 Wire Range
* Insulation O.D.=1.3~3.1mm
* Material :High conductivity copper
* Finished: Tin-Plated or Gold-Plated
* Qty/Reel: 10,000 PCS
* Thickness: 0.20mm


## *Ordering information:*


*ZH-5700-T X X R S T-3Z*
*1 2 3 4 5 6*

1 T=Terminal
2 Plated:
T=Tin G=Gold
3 Plated Method:
A: Plated before stamping
B: Stamping before plated
4 Material:
R: High conductivity copper
5 S: Low Heel
6 T-3Z: New Tyep Termiral 3 LOGO"ZH"




标示“▲”的尺寸需重点管控

| TOLERANCE | |
|---|---|
| X. | -- |
| X.X | ±0.25 |
| X.XX | ±0.15 |
| X.XXX | ±0.05 |
| ANGULAR | -- |
| APPROVALS | |
| DRAWN | |
| CHECKED | |
| APPROVED | |

Zen High Precision Industrial Ltd

TITLE: 4.20mm (.165") Pitch High Terminal

| VIEW | SCALE | PART NO. | REV. |
|---|---|---|---|
| | 1:1 | ZH-5700-TXXRST-3Z | A0 |
| UNIT | SIZE | DWG NO. | SHEET |
| MM | A4 | TB1-220204 | 1 OF 1 |

Zen High Precision Industrial Ltd PDF ISSUED D.C